

Top Row Set Perpendicular to Wall Face
Slope Varies, Height Varies


Uni-Axial Geogrid Re-inforcing:
-Wrap Three Face Units
-Anchor Back at Top

On-Site or Imported Backfill
Compact to 95% Standard
Proctor Density

4" (10 cm) Perforated Drain Tile
w/Sock; Drain thru Wall

Rip Rap Rock Toe

In-Situ Soil

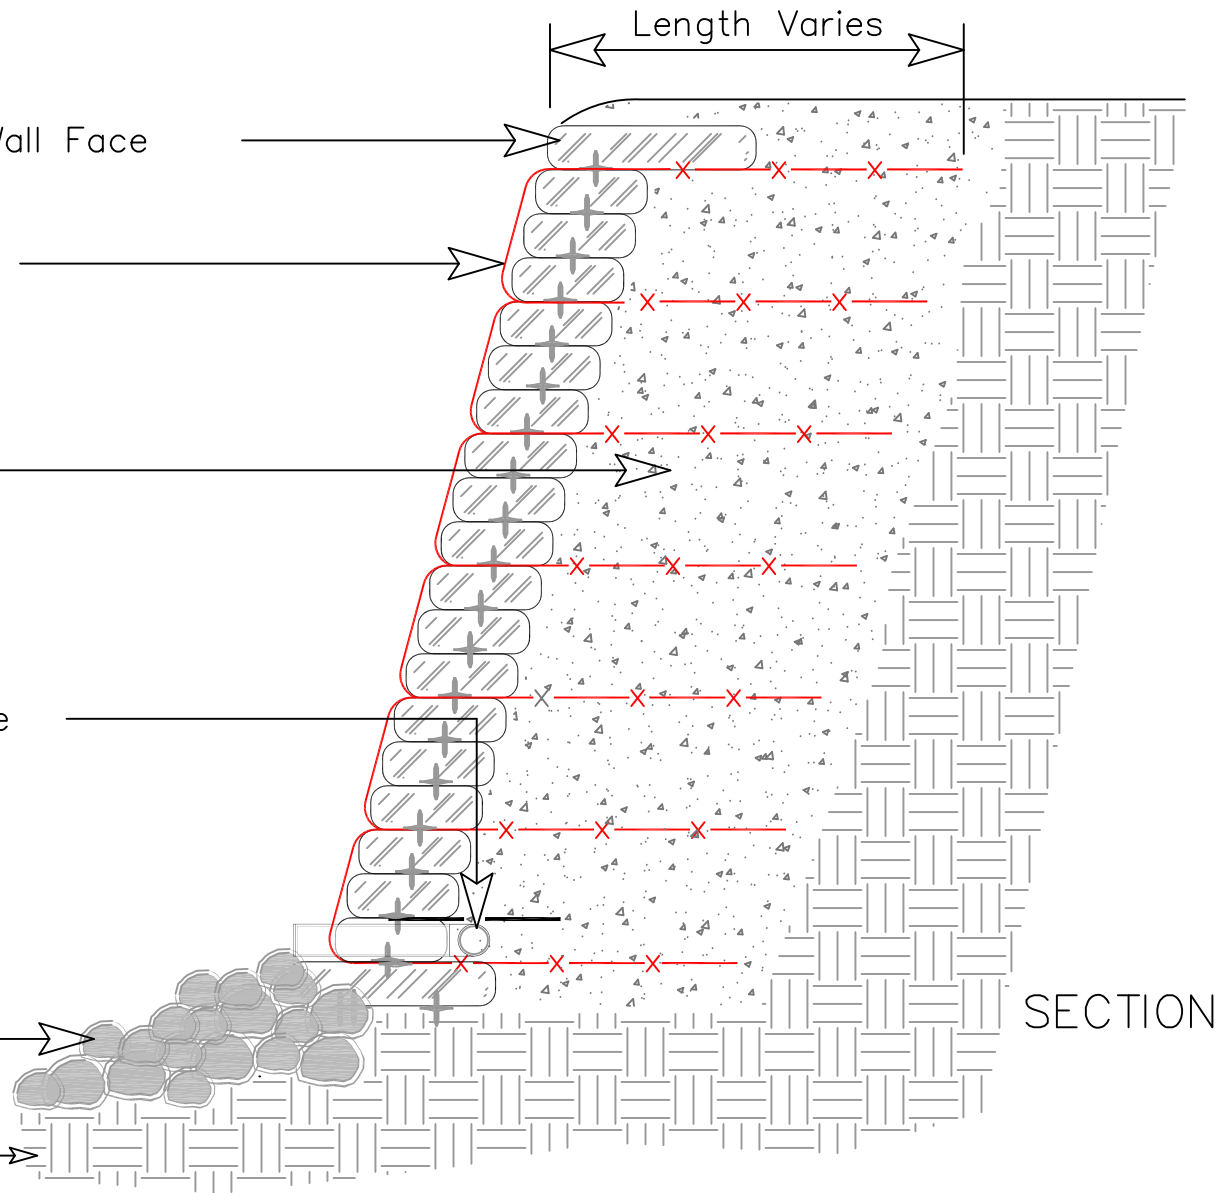

This is a typical, non-site specific design. Envirolok LLC makes these documents available on an 'as is' basis. All CAD (.dwg) and PDF (.pdf) files were created as a service to our customers. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. A final project specific design should be prepared by a qualified, licensed, professional engineer. THIS DRAWING IS NOT FOR CONSTRUCTION. Copyright 2017, Envirolok LLC

PROJECT
ENVIROLOK INSTALLATION
GEOGRID ARMORING

DATE
APRIL 2017

SHEET
SHEET 20

SCALE
1/2" = 1' - 0"

EnvirolokTM
Vegetated Environmental Solutions

10101 N. Casey Road
Evansville, WI 53536
(P) 608.226.2565

www.envirolok.com
ecosolutions@envirolok.com
(F) 608.884.4640

REVISIONS