
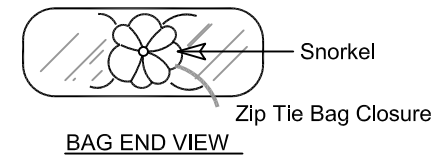


NOTE:

- Two Connector Pins shall be installed per bag, interconnecting the bags vertically
- Connector Pins shall be used to connect the first row of bags to the base setting course.
- Connector Pins shall penetrate each bag and/ or base course minimum of 2".
- Pin locations will vary with the slope of the structure and should be placed in the center of the bag contact area between courses.

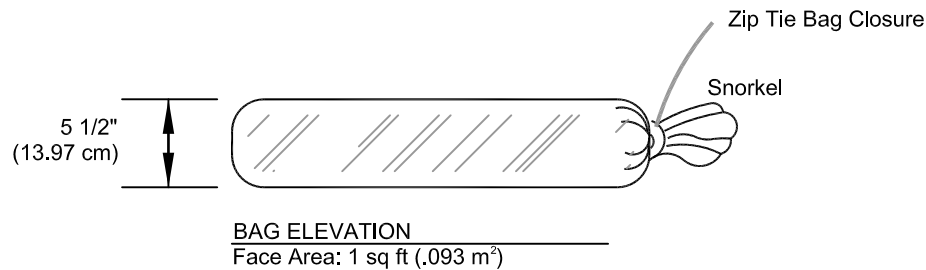

ENVIROLOK BAG SPECIFICATION:

Calculated Unit Fill: 1.25 cu ft (.0354 m³)/unit

Face Area: 1 sq ft (.093 m²)

Mattress Face Area: 2.7 sq ft (.25 m²)/unit

NOTE:

- Quantities required vary based on unit filling and design layout
- One Envirolok Unit consists of:
One (1) Envirolok Bag
Two (2) Connector Pins
One (1) Zip Tie Bag Closure

This is a typical, non-site specific design. Envirolok LLC makes these documents available on an "as is" basis. All CAD (.dwg) and PDF (.pdf) files were created as a service to our customers. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. A final project specific design should be prepared by a qualified, licensed, professional engineer. THIS DRAWING IS NOT FOR CONSTRUCTION. Copyright 2017, Envirolok LLC

TITLE
STANDARD UNIT DETAIL

DATE
APRIL 2017

SCALE
1" = 1' - 0"

SHEET
SHEET 1



10101 N. Casey Road
Evansville, WI 53536
(P) 608.226.2565

www.envirolok.com
ecosolutions@envirolok.com
(F) 608.884.4640

REVISIONS
